



Preliminary Specification: Pavarocci

System Type	8.0" coaxial, 2-way, outdoor speaker (optional 64 Watt transformer available)
Impedance (nominal)	4 Ohms (nominal)
Sensitivity dB @ 2.38 V/1m ³	91.5 dB
Sensitivity dB @ 1W/1m	88.5 dB
Frequency Response (-3 dB) ¹	87 Hz - 18 kHz
Frequency Response (-10 dB) ¹	68 Hz - 22 kHz
Max. Program Power	93 dB
Coverage Angle (-6 dB @ 2 kHz)	75°
Coverage Angle (-6 dB @ 10 kHz)	90°
Transducer - Low-Frequency Driver	203.2 mm (8.0 in.) Polypropylene cone, butyl rubber surround
Transducer - High-Frequency Driver	19 mm (0.75 in.) mylar dome tweeter
Low-Frequency Voice Coil	25 mm (1.0 in.)
Enclosure Material	Cast polyester resin
Inputs	Wire lead
Color Options	Brown, gray or sandstone
Width	406.4 mm (16 in.)
Height	342.9 mm (13.5 in.)
Depth	317.5 mm (12.5 in.)
Weight	10.9 kg (32 lbs.)
Included Accessories	N/A
Optional Accessories	64 Watt transformer
Packaging	1 Per box
Regulatory - CE	Approved
RoHS	Approved

¹ Frequency response is measured in half space

² Continuous power rating, EIA-426-B test

³ 2.83 Volts at a distance of 1 meter.

Key Features

- One coaxial 8.0 inch (203.2 mm) polypropylene driver with butyl rubber surround and one 0.75 inch (19 mm) mylar dome tweeter.
- UV-, scratch-, chlorine- and weather-resistant enclosure with professional-grade components for long-lasting performance and durability.
- Extremely versatile 70 Watt speaker use in any size space.
- Exotic look of weathered sedimentary rock
- Color options: brown, gray or sandstone
- Optional accessories: 64 Watt 70/100 volt transformer

Description

The Rockustics Pavarocci is a premium 2-way outdoor loudspeaker solution for installations requiring high-performance sound in a design that matches the aesthetics of its environment. The Pavarocci is designed for full-range background/foreground music and paging. The sealed, on-ground enclosure is designed to withstand rain, frost, snow and ice.

Applications

Its natural, weathered stone aesthetic makes the Pavarocci an ideal choice for theme parks, promenades, playgrounds, shopping malls, restaurants, resorts, gardens and other outdoor applications. An extremely versatile speaker, the 70 Watt Pavarocci is suited for use in all size spaces. Pavarocci speakers take advantage of an optional 64 Watt transformer (request prior to order) for use in commercial applications.

Enclosure Technology

All Rockustics cabinets are constructed from a non-polluting stone and resin compound. The cabinets maintain a natural aesthetic, weather and age naturally, and are an earth-friendly alternative to plastic construction. To ensure 100% water- and weatherproofing, all Rockustics products come as a sealed unit. Therefore, the inclusion of optional transformers must occur prior to completion by manufacturer.

Patented Rockustics Technologies

Rockustics and MSE Audio constantly develops new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents. MSE Audio actively defends its patents in order to protect Rockustics resellers and end users.

Technical Data and Specification Tools**Technical Data**

Rockustics strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from Rockustics or at www.rockustics.com.

Technical data and downloads include:

EASE™ data - 3-D polar plots

EASE™ Address - 2-D modeling for distributed systems

Autodesk® Revit® software

Tech sheets - Technical information and architectural specs for system engineers

Data Acquisition and Verification

All performance data acquired within MSE Audio are analyzed using a variety of standard measurement techniques, including Measured Length Sequence (MLS) and Time Delay Spectrometry (TDS). Performance, development, and data acquisition tools include: Gold Line TEF 20, CLIO, LMS, LEAP, and proprietary modeling software. EASE™ data are acquired through an automated CLIO/Outline/ EASE™ interface.

Architectural Specifications

The loudspeaker shall be an on-ground coaxial design consisting of one 203.2 mm (8.0 in.) low-frequency transducer and one 19 mm (0.75 in.) tweeter. The low-frequency voice coil diameter shall be 25 mm (1.0 in.).

Performance specifications of a typical production unit shall be as follows: Usable frequency response shall extend from 68 Hz - 22 kHz. Measured sensitivity (2.83 Volt input, 1 meter) shall be at least 91.5 dB. The loudspeaker shall have a nominal impedance of 4 Ohms.

The enclosure shall be constructed of a non-polluting stone and resin compound. Color options shall be brown, gray or sandstone. All transducers and network circuitry are weather-resistant and ship in a sealed enclosure.

The external wiring input connector shall be hardwire leads. The overall cabinet dimensions shall be no more than 406 mm (16.0 in.) in width by 342.9 mm (12.5 in.) in height and 317.5 mm (12.5 in.) in depth. The unit shall weigh no more than 10.9 kg (24 lbs.) The system shall be the Pavarocci for both low and high impedance applications.


Rockustics

8005 W 110th Street, Suite 208
Overland Park, KS 66210
Phone: 913.663.5600
Fax: 913.663.3200

www.rockustics.com


All Rockustics products come with a 10-year limited warranty.

Polar Plots

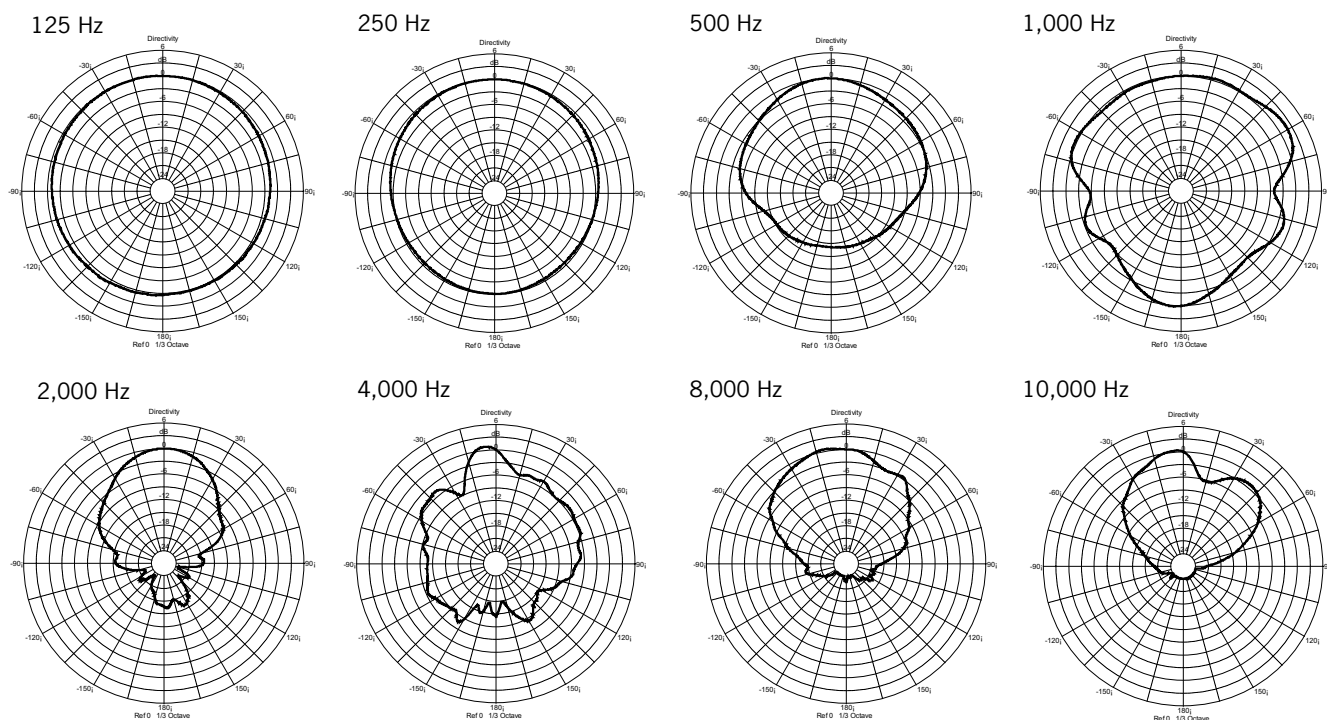

Graphs and Plots

Frequency Response

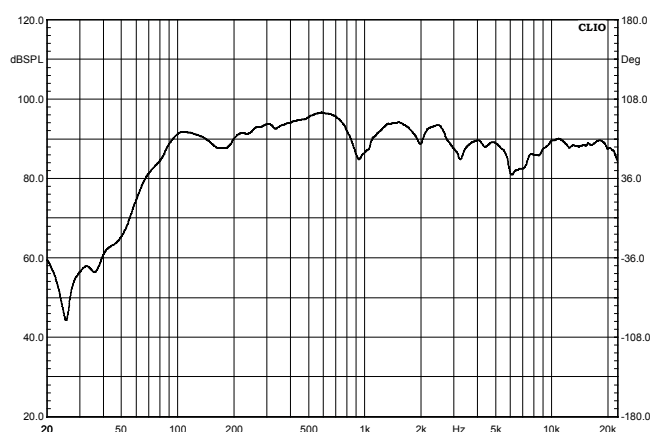

Impedance/Phase

