


The CrystalVox SONO-PT mini-amplifier is engineered to deliver optimised audio performance to the PAN67. The amplifier offers adjustable high-pass filter, tonal balance and dynamics limiter using the onboard DSP. These user-friendly controls will allow for easy in-field audio playback optimisation. Other versions include external volume control and auto fade in/out (**SONO-PTV** & **SONO-PTF**)

### Technical Specification


INPUT CONNECTION	
Type	3-way euro block
Line input	Stereo 0.775V mono summed
SPEAKER OUTPUT	
Output power	1 x 60W
Limited max. output voltage	14V
Output connection pane	4-way Phoenix 3.81mm (plug included)
CONTROLS	
Gain adjustment	-44dB / +6dB
Tone	+/-8dB in 1dB increments, 850Hz centre frequency
High pass filter	150-550Hz adjustable
Limiter	Adjustable threshold
GENERAL	
External power supply	DC12-24V 2A min
DC input connector	2.1mm barrel connector
Idle current Consumption	80mA
Current consumption 1/4 max out 8 ohms 24V	0.4A
Commodity code	8518.40.80
CE	Low voltage self-certification
DIMENSIONS	
Length	210mm
Width	97mm
Hight	41.5mm
Weight	0.9Kg

## Key Features:

- Mini amplifier optimised for the CrystalVox PAN67 directional amplifier
- External 24VDC PSU
- External master mute contact input
- Compact design
- Flanged enclosure for easy surface mounting
- Lockable input and output connectors
- High efficiency class D design with low heat dissipation
- Through hole accessible level and tonality adjustments

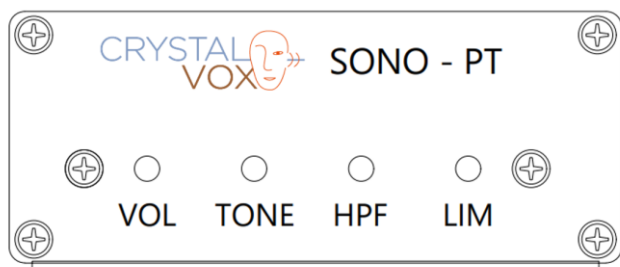


(front)

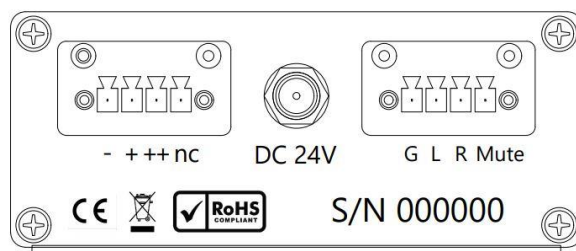


(back)

## Tone Control

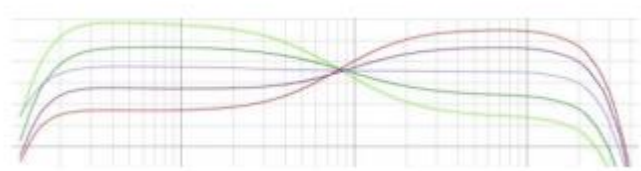

Tonal balance control

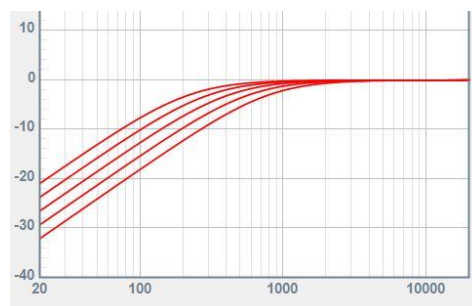

Adjustable HPF